

SHP

SHF

SHE



Sele homelifts

**SELE**

Safe lift, simple life.

ENERGY EFFICIENCY

+ COMFORT


+ SAFETY

AUTOMATIC SLIDING OR MANUAL SWING DOORS

NEW CABINS AND MATERIALS

METALLIC STRUCTURE OR CONCRETE'S SHAFT

NEW BUTTONS

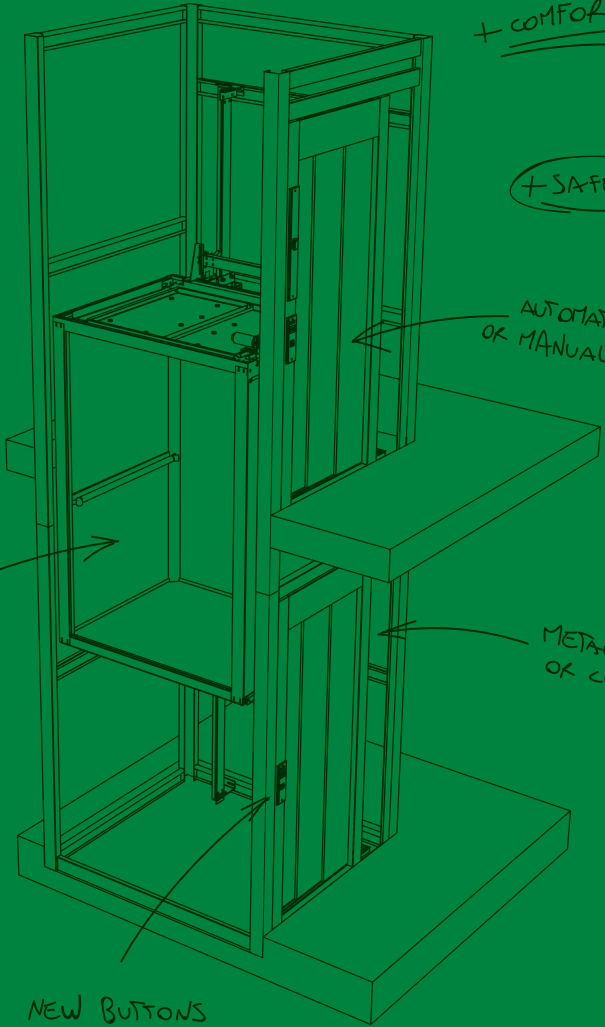



SHP

SHF

SHE



## SELE homelifts. Safety, comfort, technology.

The new SELE homelifts allow users to succeed vertical transportation needs through a wide range of solutions both technical and aesthetical. For the best flexibility and value for price SELE propose the new SHP hydraulic homelift, compatible with very small shafts. For the best eco-friendly choice, SELE propose the new SHF and SHE traction homelifts, with very low power consumption and smooth riding thanks to the innovative traction systems: gearless motor for SHE and geared high efficiency patented Gear Silent for SHF.

### Sele homelifts are designed for:

- ✔ Private houses
- ✔ Commercial and public small buildings
- ✔ Low rise buildings
- ✔ Buildings with walking areas under the lift shaft

## Main features of the Sele homelifts.



### RIDING COMFORT

Guarantee a pleasant riding experience is one of the Sele priority for all the products. The traction models, SHF and SHE thanks to the innovative motors, guarantee the best level of silence, stopping accuracy and riding smoothness.

The SHP, hydraulic, is also available with the two speeds option.



### LOW ENERGY CONSUMPTION

Sele homelifts are all class A-VDI\*4707 efficiency.

Powered by the standard single phase 220-240V supply.

Sele homelifts are made to minimize the power consumption during both riding and stand-by.



### SAFETY

Follow the standard safety regulations and design the products with "safety first" in mind is a Sele feature.

All the homelifts are equipped with certified safety components.



### REDUCED SPACES

The technical solutions engineered by Sele allow to install the homelifts in very reduced spaces.

Reduced pit and headroom for all the three Sele homelifts.

\* VDI are guidelines issued by the german engineers association and then do not replace the ISO standards.




## Cabins



GAIA



GIOCONDA

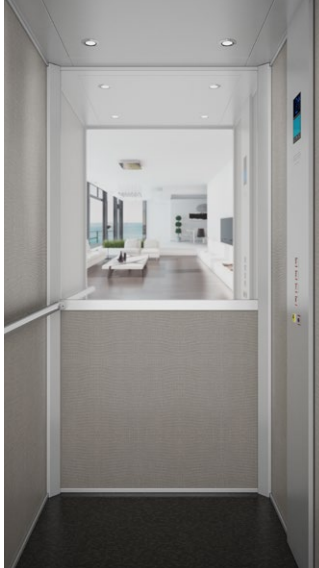


EVO

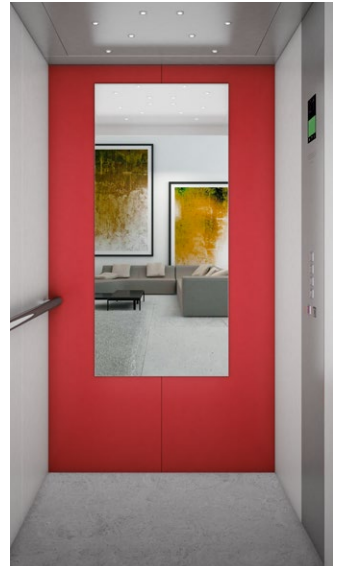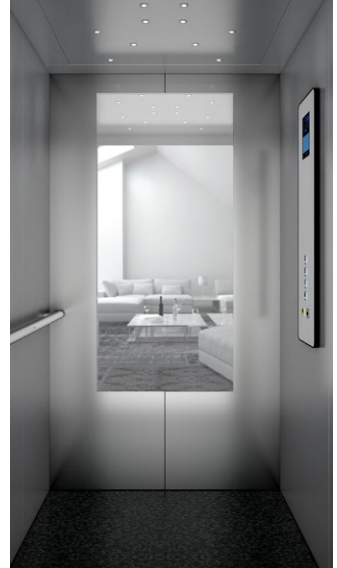

Gaia is the economic but stylish cabin, made simple but with the right combination of materials.


Gioconda is the ideal cabin for everyone that is looking for a fully customized cabin, with no compromises. It is the best solution for every style, practical and aesthetic needs, and to perfectly match the surrounding environment.

Evo is the smart cabin, dedicated to whom is looking for the best quality for reasonable price, taking in consideration the design. Minimalist and contemporary, Evo is the right choice for style and convenience with no compromises.

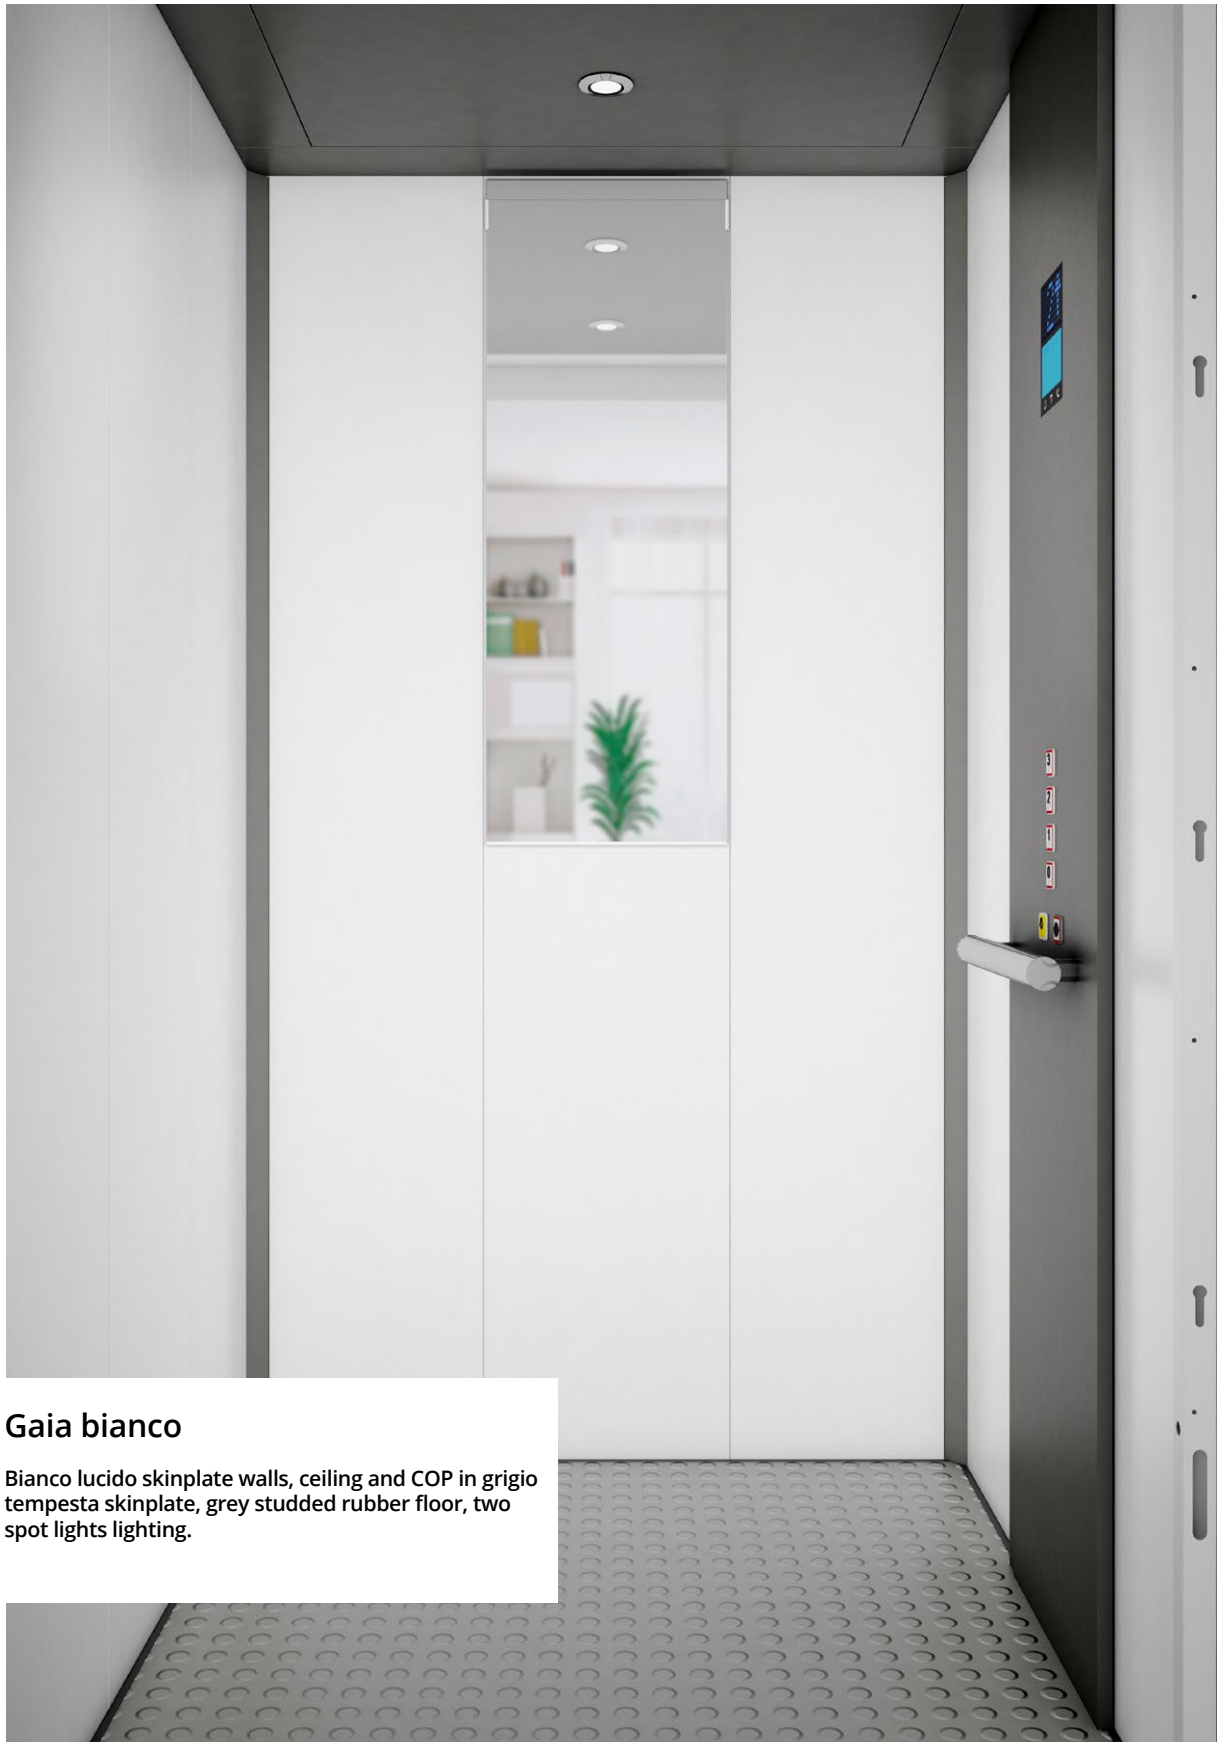

## Gaia bianco

Bianco lucido skinplate walls, ceiling and COP in grigio tempesta skinplate, grey studded rubber floor, two spot lights lighting.

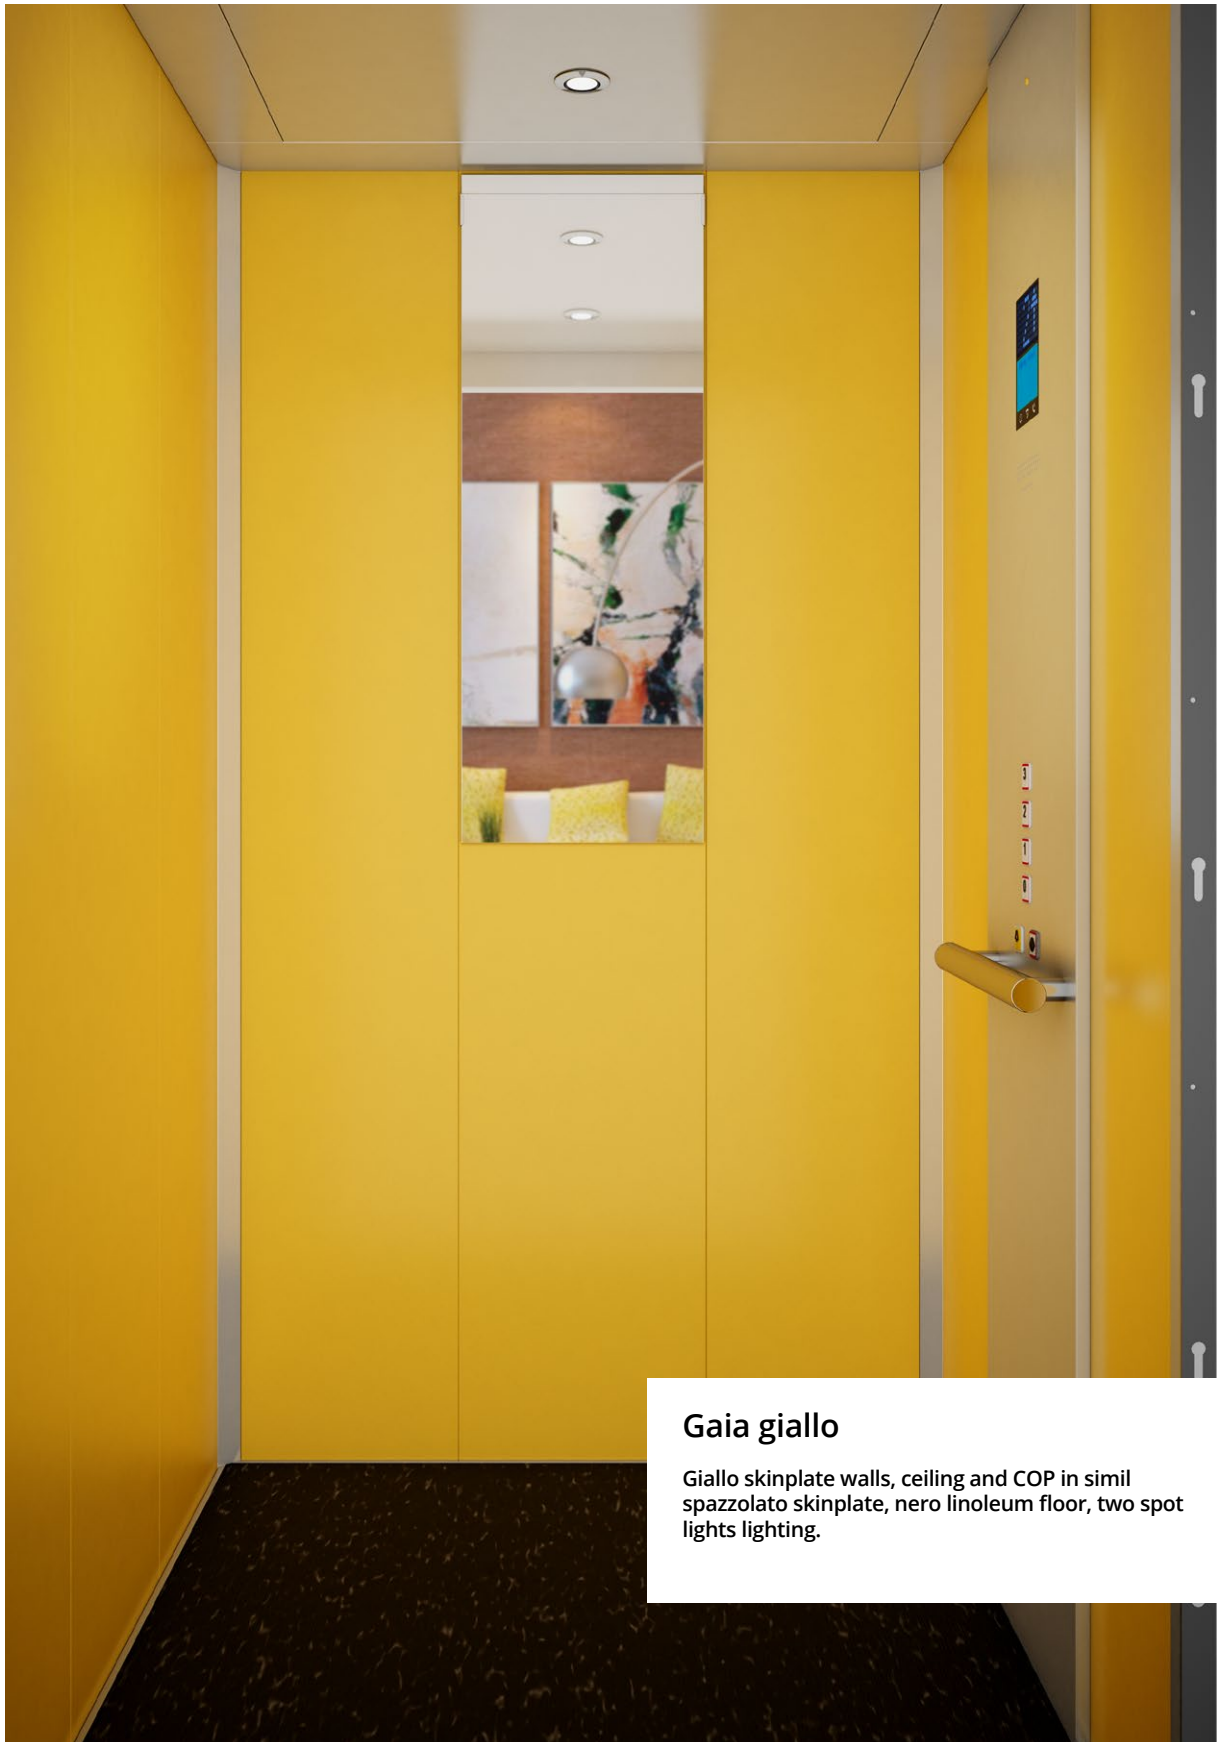

## Gaia giallo


Giallo skinplate walls, ceiling and COP in simil spazzolato skinplate, nero linoleum floor, two spot lights lighting.



## Gioconda grigio

Grigio caldo fabric skinplate walls, ceiling and COP in brushed stainless steel, nero rocksolid granit floor, four spot lights lighting.



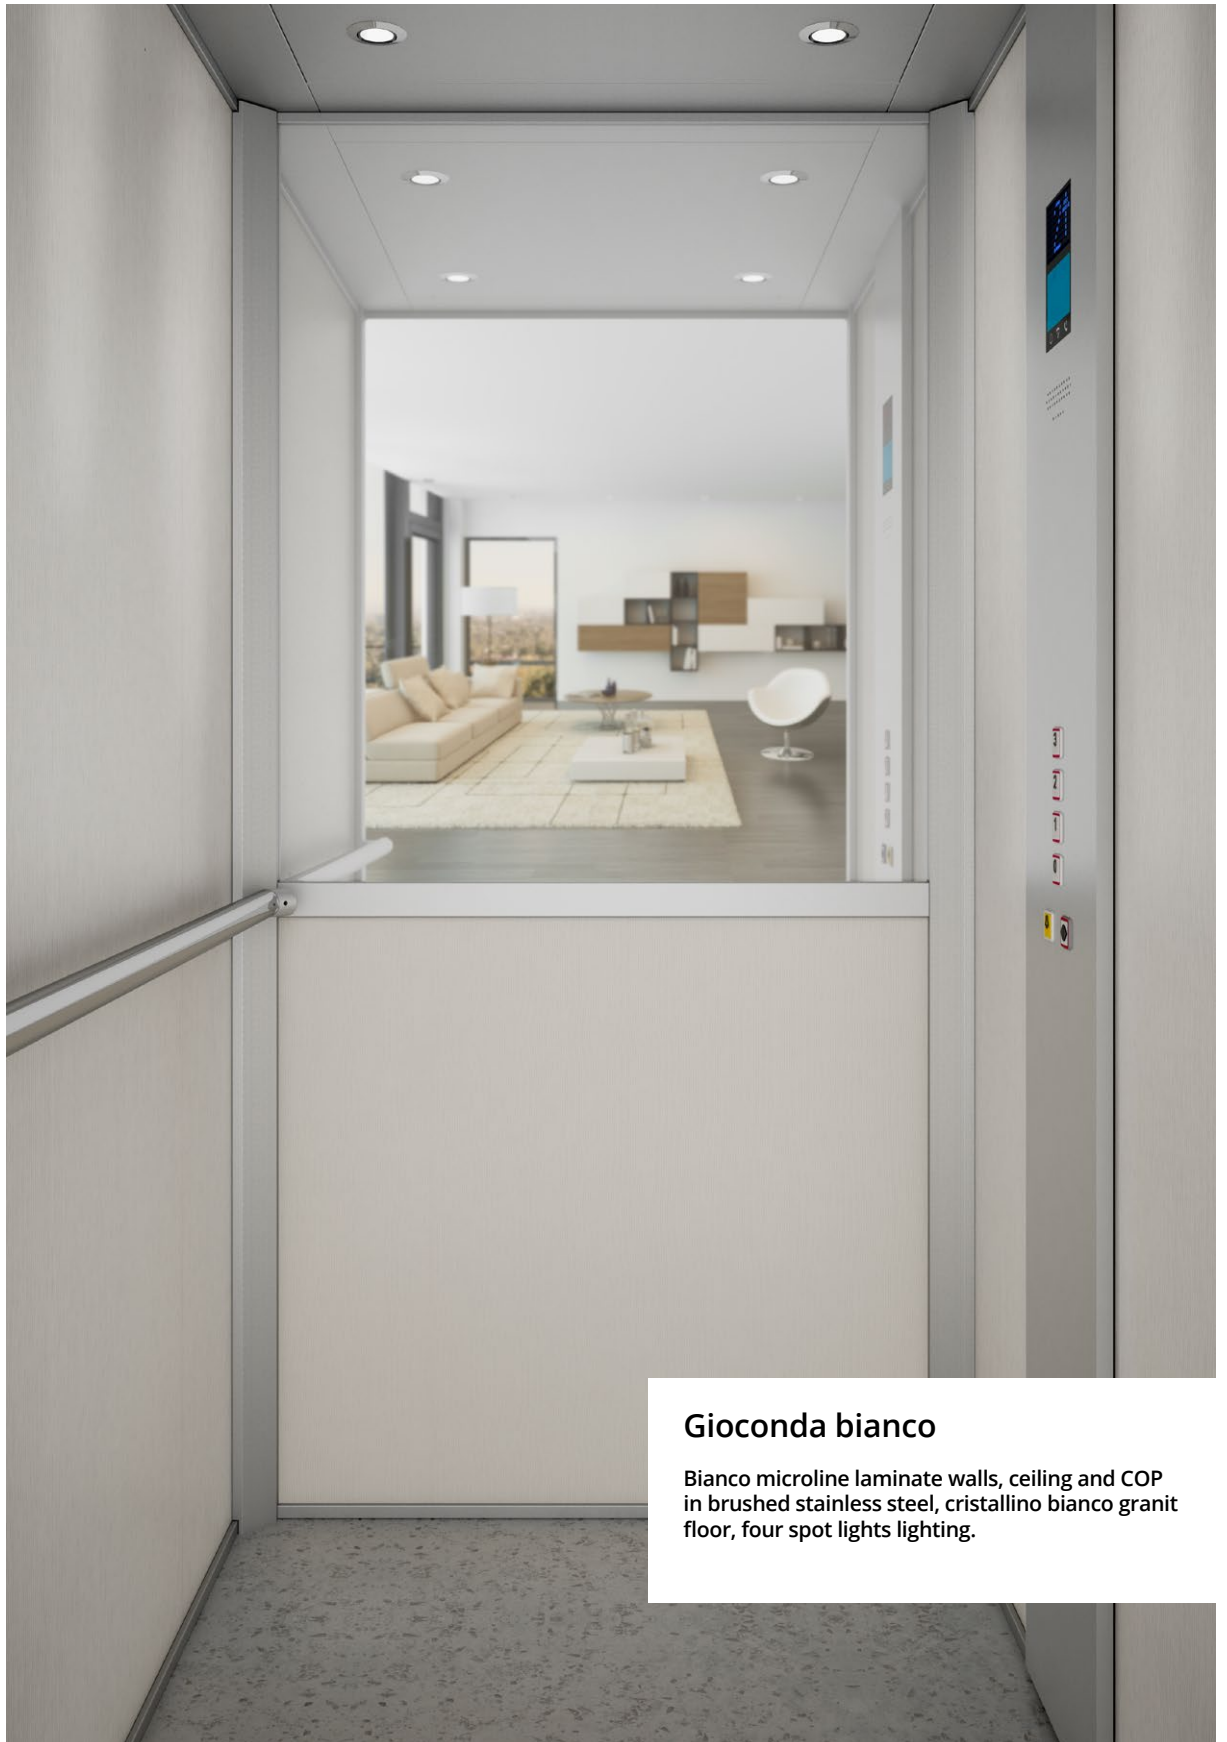


## Gioconda bianco

Bianco microline laminate walls, ceiling and COP in brushed stainless steel, cristallino bianco granit floor, four spot lights lighting.



## Evo inox

Walls and ceiling in brushed stainless steel, Link COP, nero rocksolid floor, starry sky lighting.

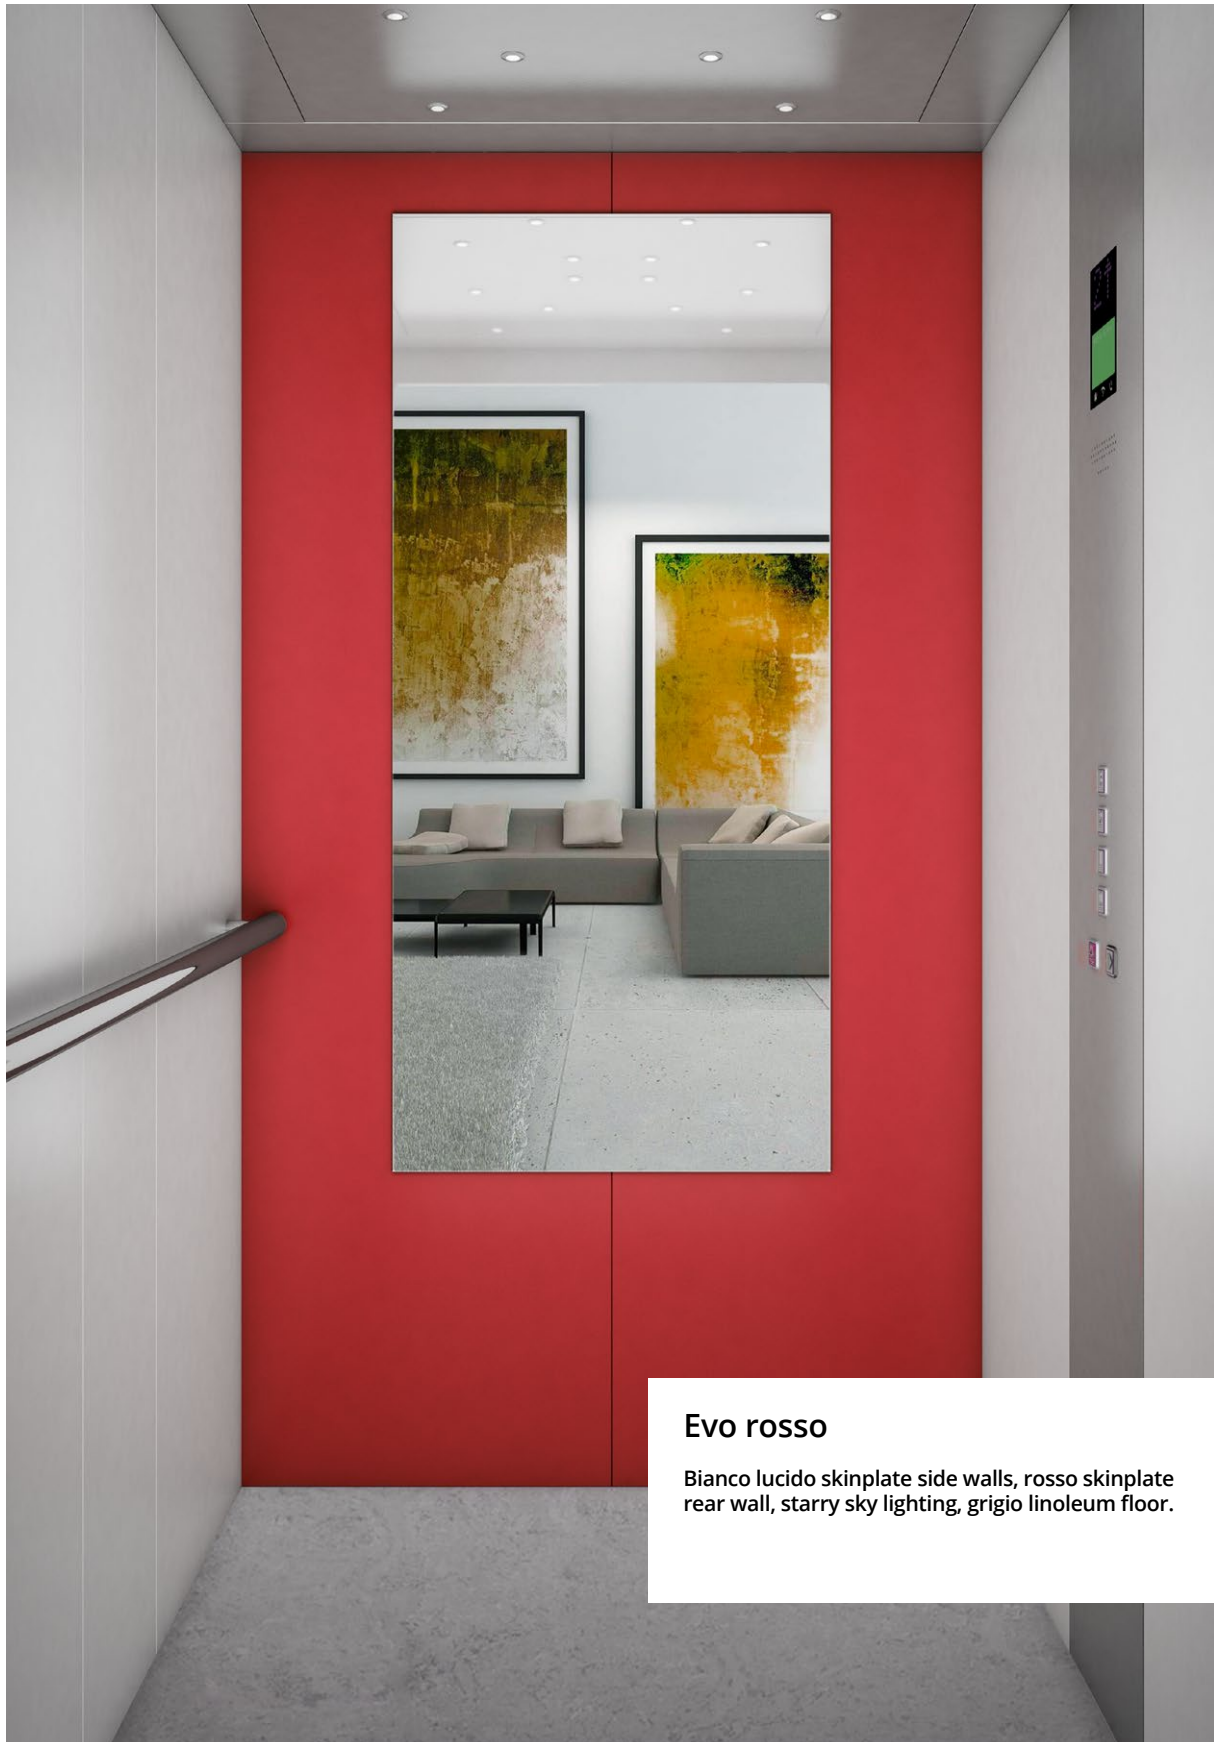

## Evo rosso

Bianco lucido skinplate side walls, rosso skinplate rear wall, starry sky lighting, grigio linoleum floor.

## Walls

It is possible to customize walls\*, door side wall, uprights, ceiling, control panel, landing doors and car door. In case of panoramic solutions, materials used for the interior walls can be applied on request also outside the car.

\* Gioconda: available walls up to 1350 mm width for stainless steel and skinplate; a dummy c.o.p. is needed for wider walls


### Skinplate

available for

GAIA

GIOCONDA


EVO



Simil inox



Bianco lucido



Bianco Panna




Sabbia



Giallo



Blu acceso




Blu scuro



Grigio lucido



Rosso



Grigio Tempesta



Grigio Alluminio

### Special skinplate

available for

GAIA

GIOCONDA

EVO



Beige  
fabric style



Grigio caldo  
fabric style



Simil Spazzolato



### Standard laminates

available for

GIOCONDA

EVO



### Special laminates

available for

GIOCONDA

EVO




### Stainless Steel

available for


GAIA

GIOCONDA

EVO

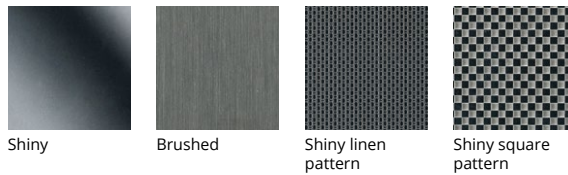

### Glass and Mirror

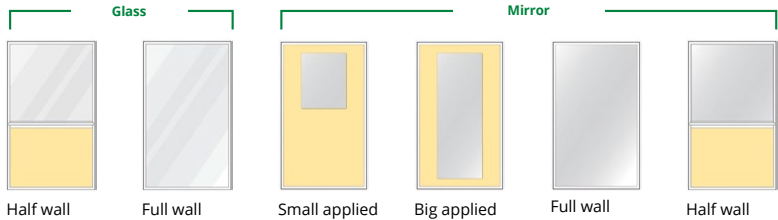

available for

GIOCONDA

GIOCONDA

GAIA

GAIA

GIOCONDA

GIOCONDA

GIOCONDA

EVO

EVO

EVO

note: for all cabins, finishes can be in skinplate or stainless steel options only


# Floors

## Studded Rubber

available for all cabins




Nero




Grigio

## Linoleum

available for all cabins




Sabbia



Rosso




Caffè




Verde




Blu



Grigio



Nero




Viola

## Granit


available for all cabins




Sabbia



Nero



Bianco



Grigio



Other colors  
on request

## Floor By Customer thickness

**GAIA** Max 7 mm

**GIOCONDA** Max 14 mm

**EVO** Max 20 mm

# Complements

## Ceiling



2 Spotlights



4 Spotlights



Starry

## Handrail



**Straight on wall handrail full lenght**

Brushed or shiny stainless steel.



**Curved on wall handrail**

Brushed stainless steel lenght 501 mm.



**Straight handrail over COP**

Brushed or shiny stainless steel, lenght 410 mm.

GAIA



**Curved handrail over COP**

Brushed or shiny stainless steel, lenght 400 mm.

GAIA

# Customization

## Vertical car operating panel



Standard

**GAIA** protruding

**GIOCONDA** protruding

**EVO** flush



Link\*

**EVO** protruding

\*n/a with laminate walls

## Landing position indicator




TFT on a Plate



TFT on a Ala

## Dot matrix position indicators



## TFT position indicator



Theme 1



Theme 2



Theme 3



Theme 4



Theme 5

## Pushbuttons



Round pushbutton with red or blue lighting



Dual light round pushbutton



Dual light round pushbutton Australia



Square pushbutton with red or blue lighting



Oval pushbutton with red or blue lighting

## Landing operating panels



Plate



Ellipse with mini dot



Ala with key

## Manual swing landing doors

### Iron

- ✔ Anti-rust paint color RAL 7032 (standard);
- ✔ RAL paint in a choice of colours;
- ✔ Stainless steel cladding on landing side;
- ✔ Stainless steel cladding on both sides;
- ✔ Wood cladding (landing side or both sides);
- ✔ Fire-rated doors according to EN81-58: EI 120 (C1 only).



C1 door  
windowless



V1 door window  
100 x 550 mm



P1 door  
(the dimension of  
the window follows  
the door opening)



P2 door  
(the dimension of  
the window follows  
the door opening)

### Anodized aluminium with glass panel



Door Glass panel:  
- Clear  
- Coloured (smoked, grey, bronze)  
Configuration for 4+4+0.76 pane  
Door jamb and frame:  
- RAL paint finish in a choice of colours  
- Anodised aluminium

### Iron jamb and full glass door panel



Door Glass Panel:  
- Clear  
- Stopsol bronze  
- Etched  
Jamb:  
- RAL paint finish in a choice of colours  
- Stainless steel cladding brushed finish  
- Stainless steel cladding shiny finish

## Folding doors

### Car folding doors, manual or automatic (coupled with manual swing landing doors only)

Door opening: 500 ÷ 1100 mm  
Door height: 1900 ÷ 2100 mm



Ci DOOR  
Windowless



V1 DOOR  
Window  
100 x 585 mm




P1 DOOR  
(the dimension of  
the window follows  
the door opening)



P1 MAX DOOR  
(available only for  
automatic model)

### Handles



Aluminium anodized - silver  
L 8 mm=300 (Optional)



Polymer



Stainless steel aisi 304  
Ø=15 L=220 mm  
(Standard for aluminium doors)  
L=550 mm (Optional)



Embedded Plastic



Embedded stainless steel  
inox aisi 304



External chrome/satin  
or brass knob

## Automatic side-opening doors



### 2 panels

#### with side opening

Door opening mm: 600 - 650  
- 700 - 750 - 800 - 850 - 900

### 3 panels

#### with side opening

Door opening mm: 600 - 650  
- 700 - 750 - 800 - 850 - 900 950 - 1000 - 1050

### Finishings

- Anti-rust paint RAL 7032 (standard)
- RAL paint, colour on request (Only with Sele structure)
- Skinplate and stainless steel (See car finishes)



### Glass framed door

#### Headroom from 2500 mm

Dimensions on request  
Clear glass (standard) or colours on request  
Door frame finishes:

- Anti-rust paint RAL 7032 (standard) or colour on request
- Stainless steel

### Full glass panel

#### Headroom 2900 mm

Dimensions on request  
Clear glass (standard) or colours on request  
Door frame and lower guide finishings:

- Anti-rust paint RAL 7032 (standard) or colour on request
- Stainless steel

Glass framed door

Full glass panel

# Accessories

## CONTROL

### **Automatic push button (Optional)**

The controller stops the car at the selected floor single push.

## SAFETY

### **Emergency lighting (Standard)**

Determines the ignition of an emergency light in the car in case of power cut.

### **Photocell barrier (Optional)**

A photocell barrier detects (along the full height) object or people that cross the sill and immediately activates blocking mechanisms.

### **ARD (Optional)**

Enables automatic arrival of the car at floor in the event of a power cut.

### **Telephone dialler for land line or mobile (Optional)**

In the event of passengers getting trapped, it assures a permanent telephone connection to the emergency number.

## ENERGY SAVING

### **Car light operation (Standard)**

The car light is switched off after a set time to permit energy savings; it is automatically switched back on in the event of a call.

### **Ceiling with led lighting**

Results in improved performance in terms of lifespan, efficiency and energy savings.



## Cabin and shaft dimensions

The indicated dimensions show the most requested sizes. Customized solutions are also available.

Landing doors can be recessed on the floor up to:

- ✔ 60 mm for automatic 3 panels doors;
- ✔ 90 mm for automatic 2 panels doors;
- ✔ "No door" type in the cabin and swing landing doors:  
automatic push button landings/hold to run from the cabin
- ✔ "Folding doors" type in the cabin and single-hinged landing doors:
  - a) manual folding door automatic push button at landings
    - hold to run from the cabin in case of open folding
    - automatic from the cabin in case of closed folding
  - b) automatic folding door
    - automatic push button
- ✔ "Automatic two panels" type: automatic push button
- ✔ "Automatic three panels" type: automatic push button.


## Main features **SHP**

### Hydraulic homelift

Directive	European Machinery Directive 2006/42/EC
Rated load up to (kg)	400 (500*)
Max travel (m)	13,4 (16,9*)
Max number of stops	8
Speed m/s	0,15 (0,25**)
Entrances	1, 2, 3
Landing doors	Automatic side opening or manual swing
Cabin doors	Automatic sliding, folding manual/automatic, no door
Door opening (mm)	500 - 1200
Control	Automatic pushbutton at landings, automatic pushbutton or hold to run from the cabin
Power supply	220 Volts single phase /50Hz
Machinery	Indirect acting piston
Drive system	1 or 2 speeds
Controller	In a cabinet
Std distance between guide brackets (mm)	1500
Frame	Rucksack
Cabin height (mm)	2080 ( <i>Gaia</i> ), 2080 ( <i>Evo</i> ), 2040 ( <i>Gioconda</i> )
Pit Depth (mm)	150 (min 130)
Std / Min headroom (mm)	2300 without cabin door(or with manual folding door), 2400 with automatic sliding doors


\* with limitations

\*\* not for EU countries. Not 2006/42/EC compliant

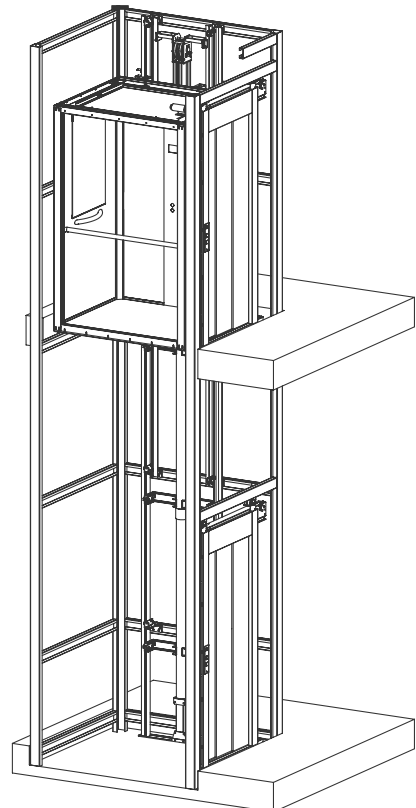


## SHP No cabin doors

1 entrance rear frame




	load (kg)		
	150	270	270
LC	550	830	900
PC	540	1200	1200
LP	500	750	800
LV	710	990	1050
PV	950	1580	1580

1 entrance side frame




	load (kg)		
	150	250	385
LC	550	800	1100
PC	580	1200	1400
LP	500	750	900
LV	900	1150	1450
PV	770	1390	1590

2 opposite entrances




	load (kg)		
	150	250	385
LC	550	800	1100
PC	580	1200	1400
LP	500	750	900
LV	900	1150	1450
PV	800	1420	1620

2 adjacent entrances



	load (kg)		
	150	2360	385
LC	580	1200	1100
PC	600	1200	1400
LP	500	800	900
LV	970	1590	1490
PV	790	1390	1590

3 entrances




	load (kg)		
	200	360	385
LC	580	1200	1100
PC	600	1200	1400
LP	500	800	900
LV	970	1590	1490
PV	820	1420	1620

all dimension in mm

LC cabin width  
PC cabin depth  
LP door opening  
LV shaft width  
PV shaft depth


# SHP Folding doors

1 entrance rear frame




	load (kg)		
	150	270	270
LC	580	830	900
PC	540	1200	1200
LP	500	750	800
LV	740	990	1050
PV	980	1640	1640

1 entrance side frame




	load (kg)		
	150	270	385
LC	580	830	1100
PC	580	1200	1400
LP	500	750	900
LV	930	1180	1450
PV	830	1450	1650

2 opposite entrances




	load (kg)		
	150	270	385
LC	580	830	1100
PC	580	1200	1400
LP	500	750	900
LV	930	1180	1450
PV	920	1540	1740

2 adjacent entrances



	load (kg)		
	150	360	385
LC	620	1200	1100
PC	620	1200	1400
LP	500	800	900
LV	1060	1640	1540
PV	870	1450	1650

3 entrances




	load (kg)		
	150	2360	385
LC	620	1200	1100
PC	620	1200	1400
LP	500	800	900
LV	1060	1640	1540
PV	960	1540	1740

all dimension in mm

- LC cabin width
- PC cabin depth
- LP door opening
- LV shaft width
- PV shaft depth


# SHP Automatic doors 2 panels

1 entrance rear frame




	load (kg)		
	150	270	385
LC	1050	900	1200
PC	540	1200	1200
LP	700	750	800
LV	1250	1300	1400
PV	1080	1740	1740

1 entrance side frame




	load (kg)		
	150	270	385
LC	900	900	1100
PC	580	1200	1400
LP	700	750	900
LV	1250	1300	1550
PV	920	1550	1750

2 opposite entrances




	load (kg)		
	150	270	385
LC	900	900	1100
PC	600	1200	1400
LP	700	750	900
LV	1250	1300	1550
PV	1120	1720	1920

2 adjacent entrances



	load (kg)		
	225	360	385
LC	900	1200	1100
PC	1000	1200	1400
LP	700	800	900
LV	1430	1730	1750
PV	1350	1550	1750

3 entrances




	load (kg)		
	300	360	385
LC	900	1200	1100
PC	1020	1200	1400
LP	700	800	900
LV	1430	1730	1750
PV	1540	1720	1920

all dimension in mm

- LC cabin width
- PC cabin depth
- LP door opening
- LV shaft width
- PV shaft depth


# SHP Automatic doors 3 panels

1 entrance rear frame




	load (kg)		
	150	270	330
LC	840	900	1100
PC	540	1200	1200
LP	600	750	800
LV	1000	1200	1280
PV	1010	1670	1670

1 entrance side frame




	load (kg)		
	150	270	385
LC	650	850	1100
PC	580	1200	1400
LP	600	750	900
LV	1000	1200	1450
PV	850	1480	1680

2 opposite entrances




	load (kg)		
	150	270	385
LC	650	850	1100
PC	600	1200	1400
LP	600	750	900
LV	1000	1200	1450
PV	1000	1600	1800

2 adjacent entrances



	load (kg)		
	150	360	385
LC	660	1200	1100
PC	820	1200	1400
LP	600	800	900
LV	1130	1670	1570
PV	1100	1480	1680

3 entrances



	load (kg)		
	200	360	385
LC	660	1200	1100
PC	1070	1200	1400
LP	600	800	900
LV	1130	1670	1570
PV	1470	1600	1800

all dimension in mm


- LC cabin width
- PC cabin depth
- LP door opening
- LV shaft width
- PV shaft depth

# Main features SHF

## Traction with geared motor homelift

Directive	European Machinery Directive 2006/42/EC
Rated load up to (kg)	500
Max travel (m)	22
Max number of stops	8
Speed m/s	0,15 (0,3*)
Entrances	1, 2, 3
Landing doors	Automatic side opening or manual swing
Cabin doors	Automatic sliding, folding manual/automatic, no door
Door opening (mm)	500 - 1200
Control	Automatic pushbutton at landings, automatic pushbutton or hold to run from the cabin
Power supply	220/240 Volts single phase /50Hz
Machinery	1:1 ratio Gear Silent
Drive system	VVVF
Controller	Embedded in the shaft and in a console on the door frame
Std distance between guide brackets (mm)	1500
Frame	Rucksack
Cabin height (mm)	2080 (Gaia) , 2080 (Evo) , 2040 (Gioconda)
Pit Depth (mm)	150 (min 130)
Std / Min headroom (mm)	2750/2500 (with cars > 800 x1200)


\* not for EU countries. Not 2006/42/EC compliant

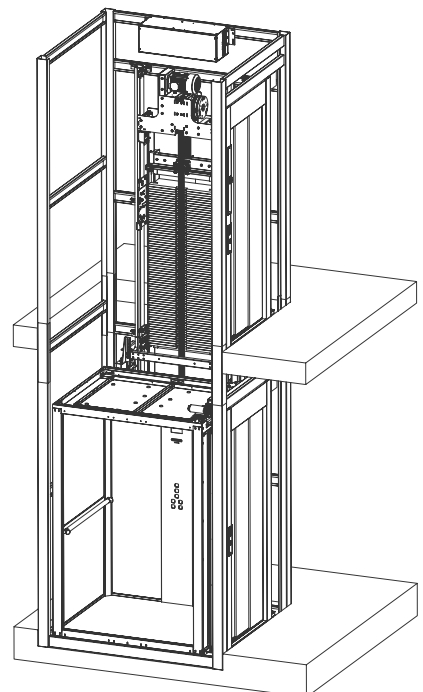

# TECHNICAL SPECS


## SHF No cabin doors

1 entrance rear frame




	load (kg)				
	200	270	270	325	500
LC	830	830	900	900	1400
PC	540	1200	1200	1400	1400
LP	750	750	800	800	900
LV	1000	1000	1050	1050	1550
PV	950	1610	1610	1810	1810

1 entrance side frame




	load (kg)			
	200	250	385	500
LC	550	800	1100	1400
PC	910	1200	1400	1400
LP	500	750	900	900
LV	930	1180	1480	1780
PV	1100	1390	1590	1590

2 opposite entrances




	load (kg)			
	200	250	385	500
LC	550	800	1100	1400
PC	910	1200	1400	1400
LP	500	750	900	900
LV	930	1180	1480	1780
PV	1130	1420	1620	1620

2 adjacent entrances



	load (kg)			
	200	360	385	500
LC	580	1200	1100	1400
PC	910	1200	1400	1400
LP	500	800	900	900
LV	990	1610	1510	1810
PV	1100	1390	1590	1590

3 entrances



	load (kg)			
	200	360	385	500
LC	580	1200	1100	1400
PC	910	1200	1400	1400
LP	500	800	900	900
LV	990	1610	1510	1810
PV	1130	1420	1620	1620


all dimension in mm

- LC cabin width
- PC cabin depth
- LP door opening
- LV shaft width
- PV shaft depth




# SHF Folding doors

1 entrance rear frame




	load (kg)				
	200	270	270	325	500
LC	830	830	900	900	1400
PC	540	1200	1200	1400	1400
LP	750	750	800	800	900
LV	1000	1000	1050	1050	1550
PV	1000	1660	1660	1860	1860

1 entrance side frame




	load (kg)			
	200	270	385	500
LC	580	830	1100	1400
PC	850	1200	1400	1400
LP	500	750	900	900
LV	960	1210	1480	1780
PV	1100	1450	1650	1650

2 opposite entrances




	load (kg)			
	200	270	385	500
LC	580	830	1100	1400
PC	850	1200	1400	1400
LP	500	750	900	900
LV	960	1210	1480	1780
PV	1170	1540	1740	1740

2 adjacent entrances



	load (kg)			
	200	360	385	500
LC	620	1200	1100	1400
PC	850	1200	1400	1400
LP	500	800	900	900
LV	1080	1660	1560	1860
PV	1100	1450	1650	1650

3 entrances



	load (kg)			
	200	360	385	500
LC	620	1200	1100	1400
PC	850	1200	1400	1400
LP	500	800	900	900
LV	1080	1660	1560	1860
PV	1170	1540	1610	1810


all dimension in mm

- LC cabin width
- PC cabin depth
- LP door opening
- LV shaft width
- PV shaft depth

# TECHNICAL SPECS


## SHF Automatic doors 2 panels

1 entrance rear frame




	load (kg)				
	200	270	385	325	500
LC	1050	900	1200	900	1400
PC	540	1200	1200	1400	1400
LP	700	750	800	750	900
LV	1250	1300	1400	1300	1550
PV	1100	1760	1760	1960	1960

1 entrance side frame




	load (kg)			
	225	270	385	500
LC	870	900	1100	1400
PC	920	1200	1400	1400
LP	700	750	900	900
LV	1250	1300	1550	1780
PV	1250	1550	1750	1750

2 opposite entrances




	load (kg)			
	225	270	385	500
LC	870	900	1100	1400
PC	930	1200	1400	1400
LP	700	750	900	900
LV	1250	1300	1550	1780
PV	1450	1720	1920	1920

2 adjacent entrances



	load (kg)			
	300	360	385	500
LC	870	1200	1100	1400
PC	1000	1200	1400	1400
LP	700	800	900	900
LV	1430	1760	1750	1960
PV	1350	1550	1750	1750

3 entrances




	load (kg)			
	300	360	385	500
LC	870	1200	1100	1400
PC	1000	1200	1400	1400
LP	700	800	900	900
LV	1430	1760	1750	1960
PV	1520	1720	1920	1920

all dimension in mm

- LC cabin width
- PC cabin depth
- LP door opening
- LV shaft width
- PV shaft depth


# SHF Automatic doors 3 panels

1 entrance rear frame




	load (kg)				
	200	270	330	325	500
LC	840	900	1100	900	1400
PC	540	1200	1200	1400	1400
LP	600	750	800	750	900
LV	1000	1200	1280	1200	1550
PV	1040	1700	1700	1900	1900

1 entrance side frame




	load (kg)			
	225	270	385	500
LC	650	800	1100	1400
PC	930	1200	1400	1400
LP	600	750	900	900
LV	1030	1200	1480	1780
PV	1200	1480	1680	1680

2 opposite entrances




	load (kg)			
	225	270	385	500
LC	650	800	1100	1400
PC	950	1200	1400	1400
LP	600	750	900	900
LV	1030	1200	1480	1780
PV	1350	1600	1800	1800

2 adjacent entrances



	load (kg)			
	200	360	385	500
LC	660	1200	1100	1400
PC	820	1200	1400	1400
LP	600	800	900	900
LV	1160	1700	1600	1900
PV	1200	1480	1680	1680

3 entrances



	load (kg)			
	200	360	385	500
LC	660	1200	1100	1400
PC	820	1200	1400	1400
LP	600	800	900	900
LV	1160	1700	1600	1900
PV	1350	1600	1800	1800

all dimension in mm


- LC cabin width
- PC cabin depth
- LP door opening
- LV shaft width
- PV shaft depth

## Main features SHE

### Traction with gearless motor homelift


Speed m/s	European Machinery Directive 2006/42/EC
Rated load up to (kg)	400
Max travel (m)	22
Max number of stops	8
Speed m/s	0,15 (0,3*)
Entrances	1, 2, 3
Landing doors	Automatic side opening or manual swing
Cabin doors	Automatic sliding, folding manual/automatic, no door
Door opening (mm)	500 - 1200
Control	Automatic pushbutton at landings, automatic pushbutton or hold to run from the cabin
Power supply	220 Volts single phase /50Hz
Machinery	2:1 ratio <i>Gearless</i>
Drive system	VVVF
Controller	Embedded in the shaft and in a console on the door frame
Std distance between guide brackets (mm)	1500
Frame	Rucksack
Cabin height (mm)	2080 ( <i>Gaia</i> ), 2080 ( <i>Evo</i> ), 2040 ( <i>Gioconda</i> )
Pit Depth (mm)	150 (min 130)
Std / Min headroom (mm)	2750/2500 (with cars > 800 x1200)

\*not for EU countries. Not 2006/42/EC compliant

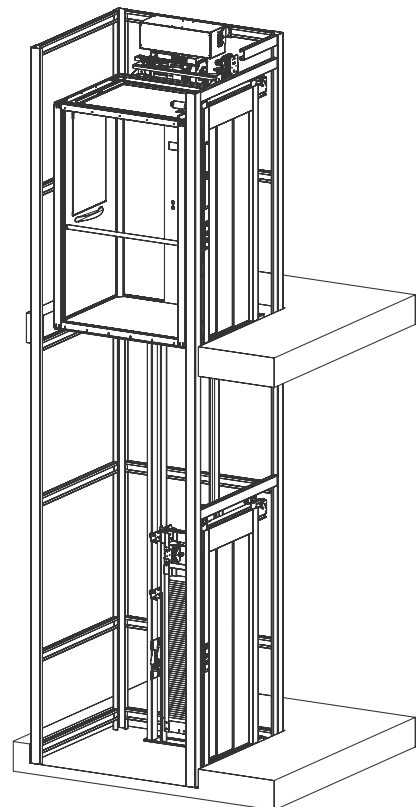


## SHE No cabin doors

1 entrance rear frame




	load (kg)		
	200	270	270
LC	830	830	900
PC	540	1200	1200
LP	750	750	800
LV	1000	1000	1050
PV	950	1610	1610

1 entrance side frame




	load (kg)		
	200	250	385
LC	550	800	1100
PC	910	1200	1400
LP	500	750	900
LV	930	1180	1480
PV	1100	1390	1590

2 opposite entrances




	load (kg)		
	200	250	385
LC	550	800	1100
PC	910	1200	1400
LP	500	750	900
LV	930	1180	1480
PV	1130	1420	1620

2 adjacent entrances



	load (kg)		
	200	360	385
LC	580	1200	1100
PC	910	1200	1400
LP	500	800	900
LV	990	1610	1510
PV	1100	1390	1590

3 entrances




	load (kg)		
	200	360	385
LC	580	1200	1100
PC	930	1200	1400
LP	500	800	900
LV	990	1610	1510
PV	1150	1420	1620

all dimension in mm

LC cabin width  
PC cabin depth  
LP door opening  
LV shaft width  
PV shaft depth


# SHE Folding doors

1 entrance rear frame




	load (kg)		
	200	270	270
LC	830	830	900
PC	540	1200	1200
LP	750	750	800
LV	1000	1000	1000
PV	1000	1660	1660

1 entrance side frame




	load (kg)		
	200	270	385
LC	580	830	1100
PC	850	1200	1400
LP	500	750	900
LV	960	1210	1480
PV	1100	1450	1650

2 opposite entrances




	load (kg)		
	200	270	385
LC	580	830	1100
PC	850	1200	1400
LP	500	750	900
LV	960	1210	1480
PV	1170	1540	1740

2 adjacent entrances



	load (kg)		
	150	360	385
LC	620	1200	1100
PC	620	1200	1400
LP	500	800	900
LV	1080	1640	1560
PV	1100	1450	1650

3 entrances




	load (kg)		
	150	360	385
LC	620	1200	1100
PC	870	1200	1400
LP	500	800	900
LV	1080	1640	1560
PV	1200	1540	1740

all dimension in mm

- LC cabin width
- PC cabin depth
- LP door opening
- LV shaft width
- PV shaft depth


## SHE Automatic doors 2 panels

1 entrance rear frame




	load (kg)		
	200	270	385
LC	1050	900	1200
PC	540	1200	1200
LP	700	750	800
LV	1250	1300	1400
PV	1100	1760	1760

1 entrance side frame




	load (kg)		
	225	270	385
LC	870	900	1100
PC	920	1200	1400
LP	700	750	900
LV	1250	1300	1550
PV	1250	1550	1750

2 opposite entrances




	load (kg)		
	225	270	385
LC	870	900	1100
PC	930	1200	1400
LP	700	750	900
LV	1250	1300	1550
PV	1450	1720	1920

2 adjacent entrances



	load (kg)		
	300	360	385
LC	870	1200	1100
PC	1000	1200	1400
LP	700	800	900
LV	1430	1760	1750
PV	1350	1550	1750

3 entrances




	load (kg)		
	300	360	385
LC	870	1200	1100
PC	1020	1200	1400
LP	700	800	900
LV	1430	1760	1750
PV	1540	1720	1920

all dimension in mm

LC cabin width  
 PC cabin depth  
 LP door opening  
 LV shaft width  
 PV shaft depth


# SHE Automatic doors 3 panels

1 entrance rear frame




	load (kg)		
	200	270	330
LC	840	900	1100
PC	540	1200	1200
LP	600	750	800
LV	1000	1200	1280
PV	1040	1700	1700

1 entrance side frame




	load (kg)		
	225	270	385
LC	650	800	1100
PC	930	1200	1400
LP	600	750	900
LV	1030	1200	1480
PV	1200	1480	1680

2 opposite entrances




	load (kg)		
	225	270	385
LC	650	800	1100
PC	950	1200	1400
LP	600	750	900
LV	1030	1200	1450
PV	1350	1600	1800

2 adjacent entrances



	load (kg)		
	200	360	385
LC	660	1200	1100
PC	930	1200	1400
LP	600	800	900
LV	1160	1700	1600
PV	1200	1480	1680

3 entrances




	load (kg)		
	200	360	385
LC	660	1200	1100
PC	1070	1200	1400
LP	600	800	900
LV	1160	1700	1600
PV	1470	1600	1800

all dimension in mm

- LC cabin width
- PC cabin depth
- LP door opening
- LV shaft width
- PV shaft depth



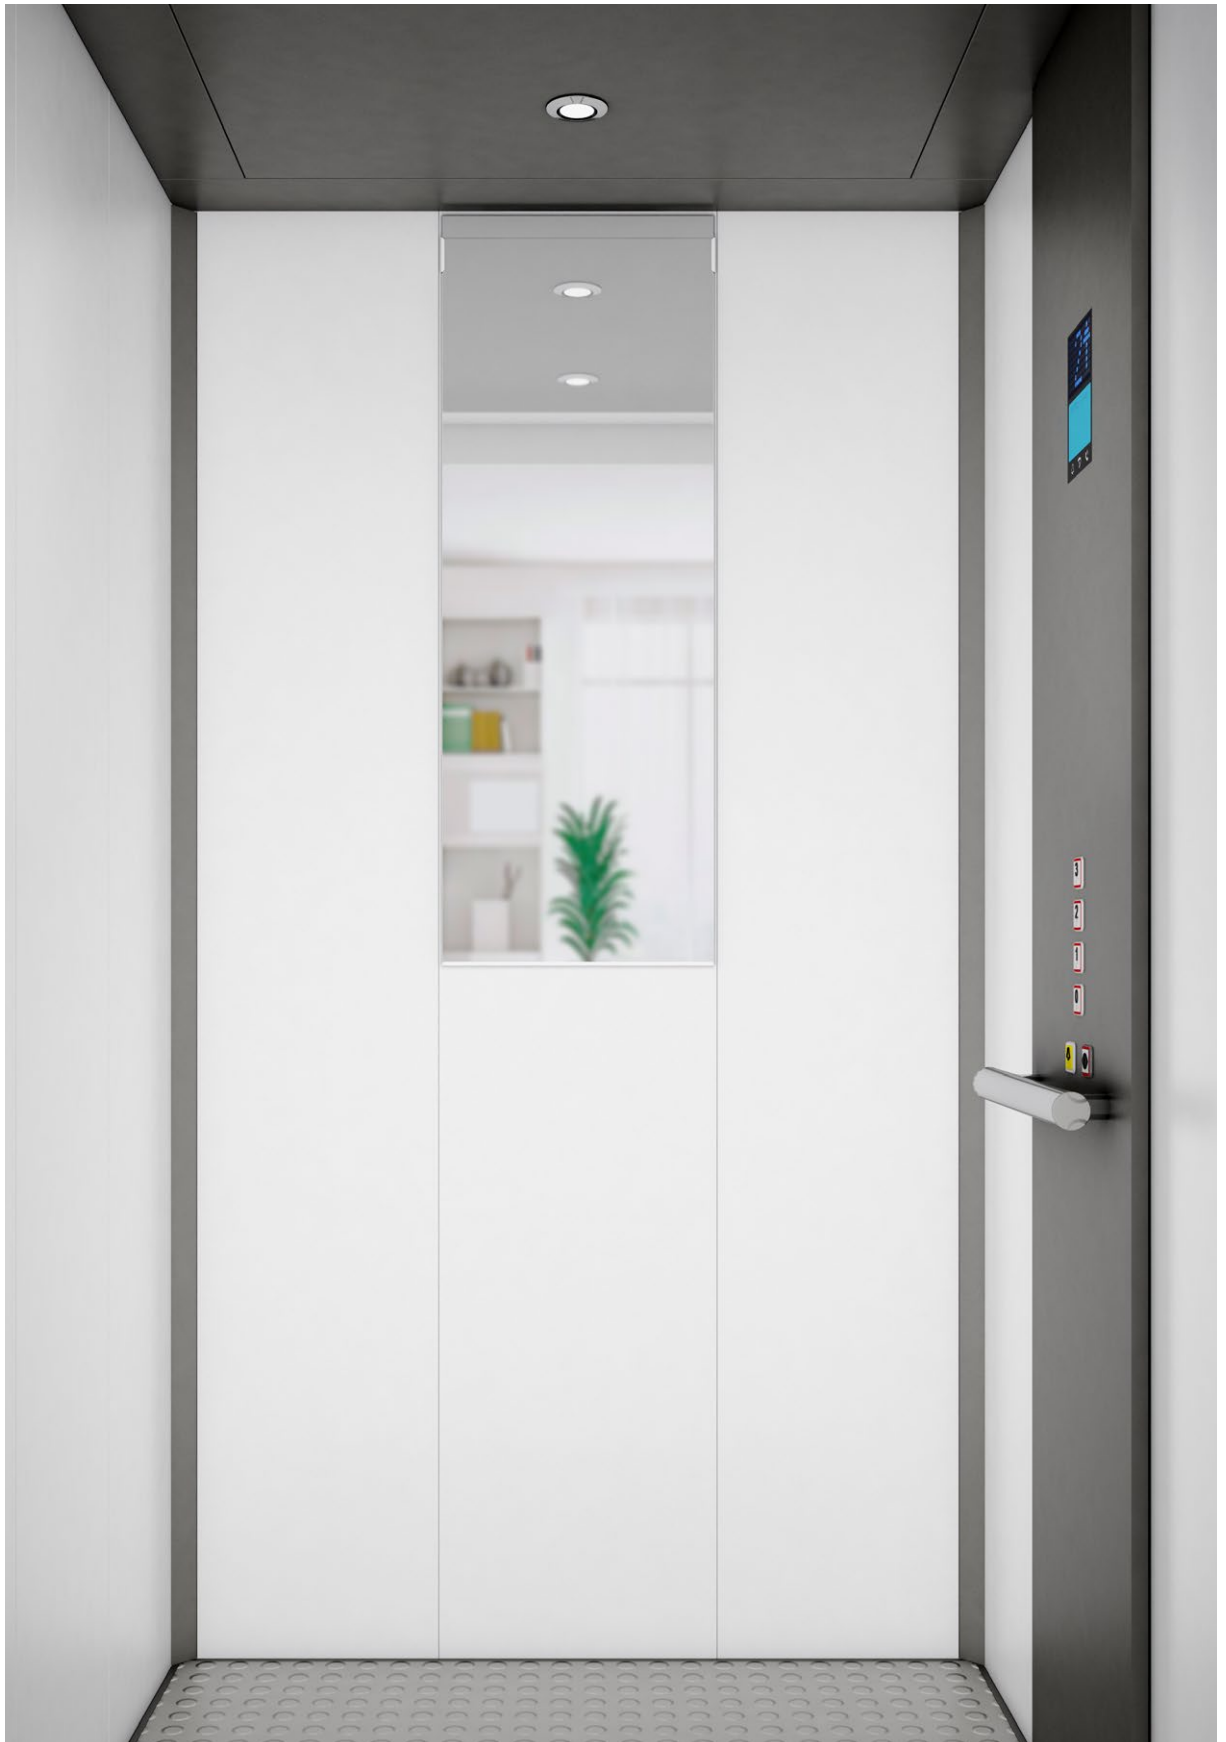

All the informations, technical data, design, colors and any other on this document, including physical samples are given to the customer as example only and then it cannot be considered binding.

Any sample or printed color cannot be considered definitive and the final result may change due to different material, color or finish.

SELE S.R.L. reserves the right to change the technical and aesthetical features without notice.



Sele srl  
Via 25 Aprile 1945, n°63  
40055 Castenaso (BO)  
T.+39.051.60.59.801  
info@Selelift.com  
www.Selelift.com



UNI EN ISO 9001:00  
ALL XIII 95/16/CE NR. I 0305

OHSAS 18001  
OCCUPATIONAL HEALTH AND SAFETY  
ASSESSMENT SPECIFICATION



Safe lift, simple life.



LIFTS



HOME LIFTS



GOODS  
LIFTS



MODERNISATIONS



ESCALATORS



STRUCTURES

[selelift.com](http://selelift.com)